


BAIRD Non-Penetrating and Penetrating Support System

AFC EHD

The AFC EHD is designed to handle up to and including a 5.0M antenna. Larger antennas may be used, but each installation must be reviewed by Baird to determine if the mount can withstand the loads. The mount is available in four footprints ranging from 20' x 20' (shown) to 28' x 28' to spread the ballast load over a greater area. The AFC EHD must be used in conjunction with an adapter kit (not pictured) which allows the antenna support structure to attach to the AFC EHD base. The maximum length of any part of the AFC HD is 10' to allow for easier shipping and handling.

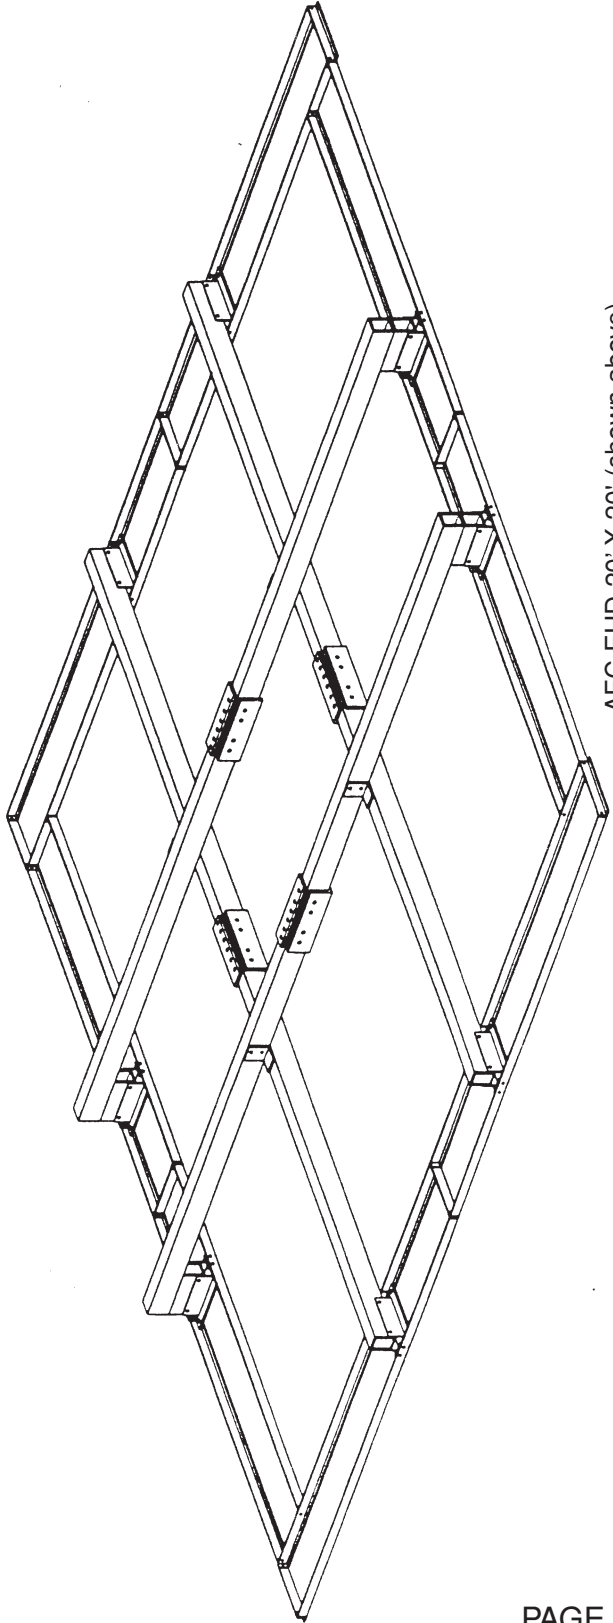

AFC EHD 20' X 20' (shown above)





PRODUCT SPECIFICATIONS

MODEL: AFC EHD

Non-Penetrating or Penetrating flat roof antenna supporting system.

TYPICAL USAGE

1. Handles up to a 5M antenna.
Larger antenna may be used on the AFC EHD. However, each installation must be examined to determine if the mount can withstand the wind loads it may be subjected to at the site.
2. Footprints
 - a. 20' = 20' = 400 sq.ft.
 - b. 22'8.5" x 22'8.5" = 515.7 sq.ft.
 - c. 25'5" x 25'5" = 646 sq.ft.
 - d. 28'1.5" x 28'1.5" = 791 sq.ft.

Finish - Hot dip galvanized

The AFC EHD requires an adapter kit (not shown) to mount the antenna. Each adapter kit is designed to handle a specific antenna, based on the antenna diameter and antenna manufacturer.

Ballast required will be recommended based on antenna diameter, type and survival requirements.

It is the customer's responsibility to see that all applicable codes are satisfied. It is suggested that a structural engineer review the application of this product.

A pad can be supplied to isolate the mount from the roof surface.

Under extreme wind conditions the mount should be tethered with cable.

